

TRACE CIRCULAR X-LARGE CEILING MOUNTING PLATE

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1305 x 1305 x 290 mm (l x w x h)

WEIGHT

21kg (46.3lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 398 mm

maximum on request 8298 mm

supplied with 1000mm stainless steel power cable as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 50.4w - 2700k

110-130v - integrated LED - 50.4w - 2700k

LED driver to be installed in the ceiling cavity or remote

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

ceiling plate - 116mm x 116mm x 8mm

CERTIFICATION



VIEW ON WEBSITE

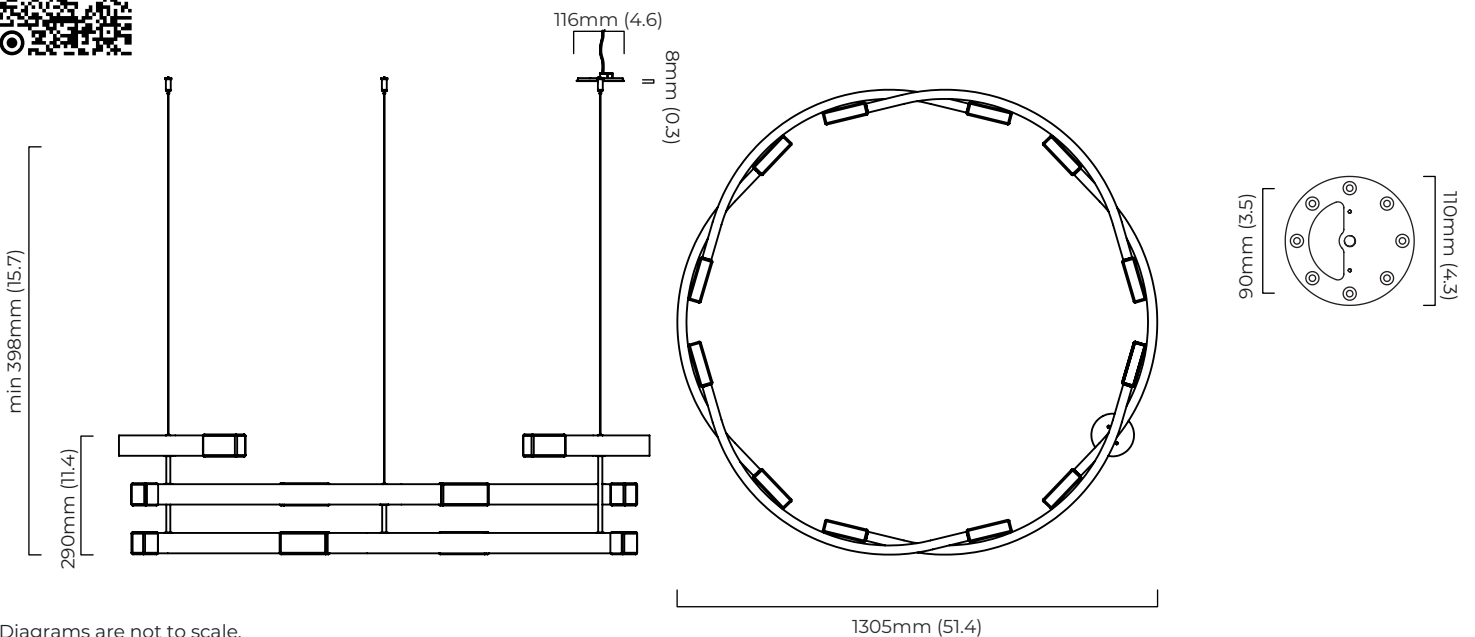

*Diagrams are not to scale.

TRACE CIRCULAR X-LARGE CEILING ROSE

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1305 x 1305 x 290 mm (l x w x h)

WEIGHT

25kg (55.1lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 430 mm

maximum on request 8330 mm

supplied with 1000mm stainless steel power cable as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 50.4w - 2700k

110-130v - integrated LED - 50.4w - 2700k

LED driver to be installed in the ceiling rose

DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

ceiling rose - 195mm x 195mm x 40mm

CERTIFICATION



VIEW ON WEBSITE

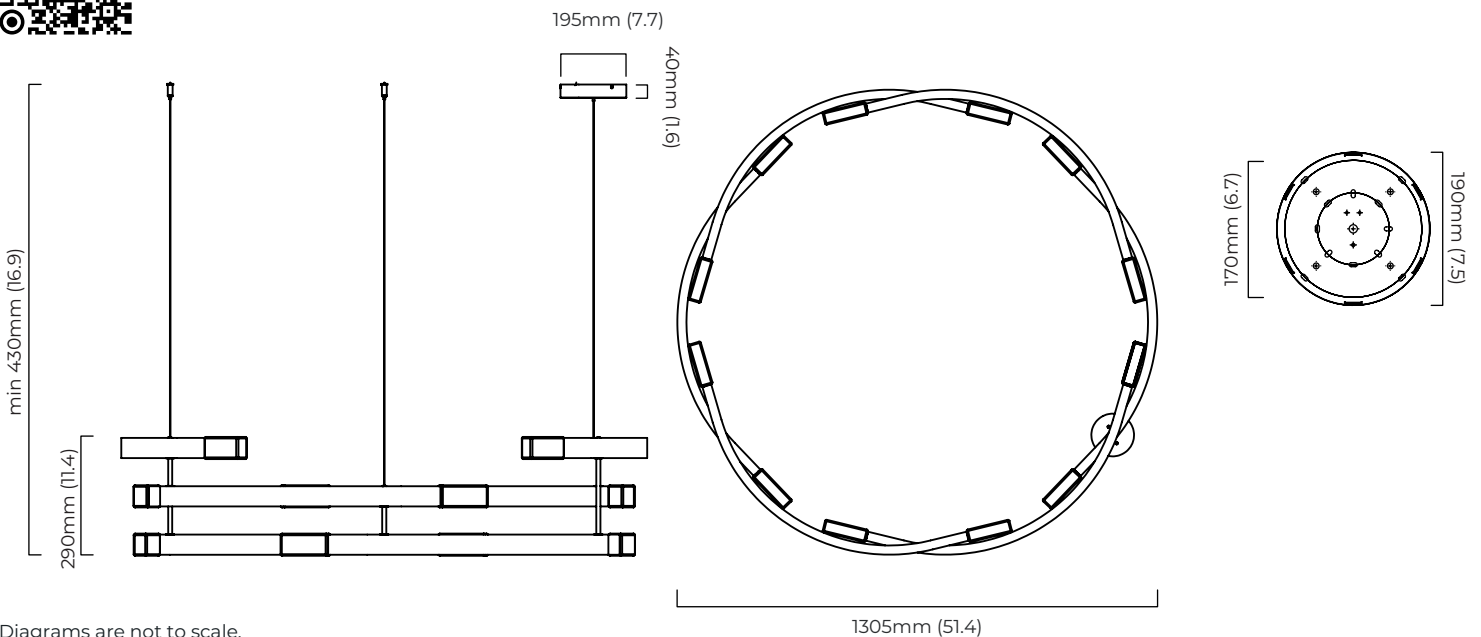

*Diagrams are not to scale.

TRACE CIRCULAR X-LARGE CEILING MOUNTING PLATE - DALI A

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1305 x 1305 x 290 mm (l x w x h)

WEIGHT

21kg (46.3lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 398 mm

maximum on request 8298 mm

supplied with 1000mm stainless steel power cable as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 50.4w - 2700k

110-130v - integrated LED - 50.4w - 2700k

DALI LED driver to be installed in the ceiling cavity or remote
drivers must be installed up to 20 meters from the body of the light

DIMMING

DALI compatible


CEILING ROSE / PLATE

ceiling plate - 116mm x 116mm x 8mm

CERTIFICATION



VIEW ON WEBSITE

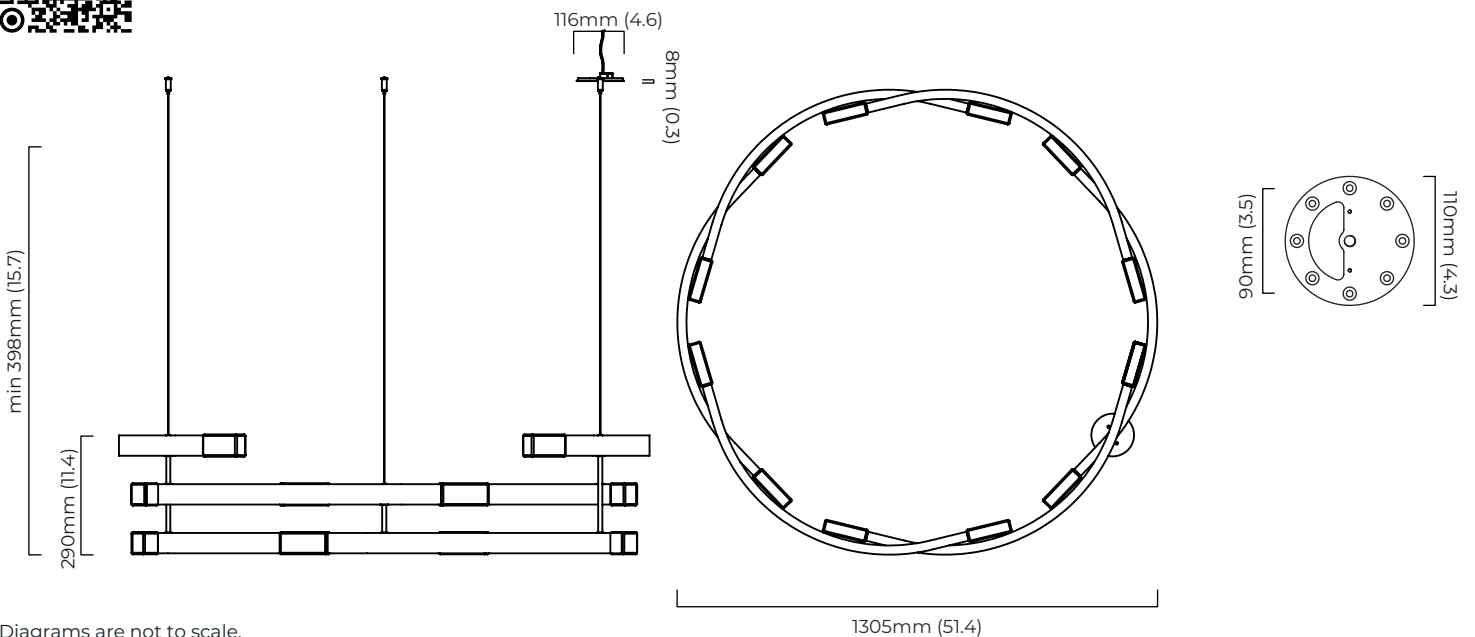

*Diagrams are not to scale.

TRACE CIRCULAR X-LARGE CEILING ROSE - DALI A

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1305 x 1305 x 290 mm (l x w x h)

WEIGHT

25kg (55.1lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 430 mm

maximum on request 8330 mm

supplied with 1000mm stainless steel power cable as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 50.4w - 2700k

110-130v - integrated LED - 50.4w - 2700k

DALI LED driver to be installed in the ceiling rose

DIMMING

DALI Compatible


CEILING ROSE / PLATE

ceiling rose - 195mm x 195mm x 40mm

CERTIFICATION



VIEW ON WEBSITE

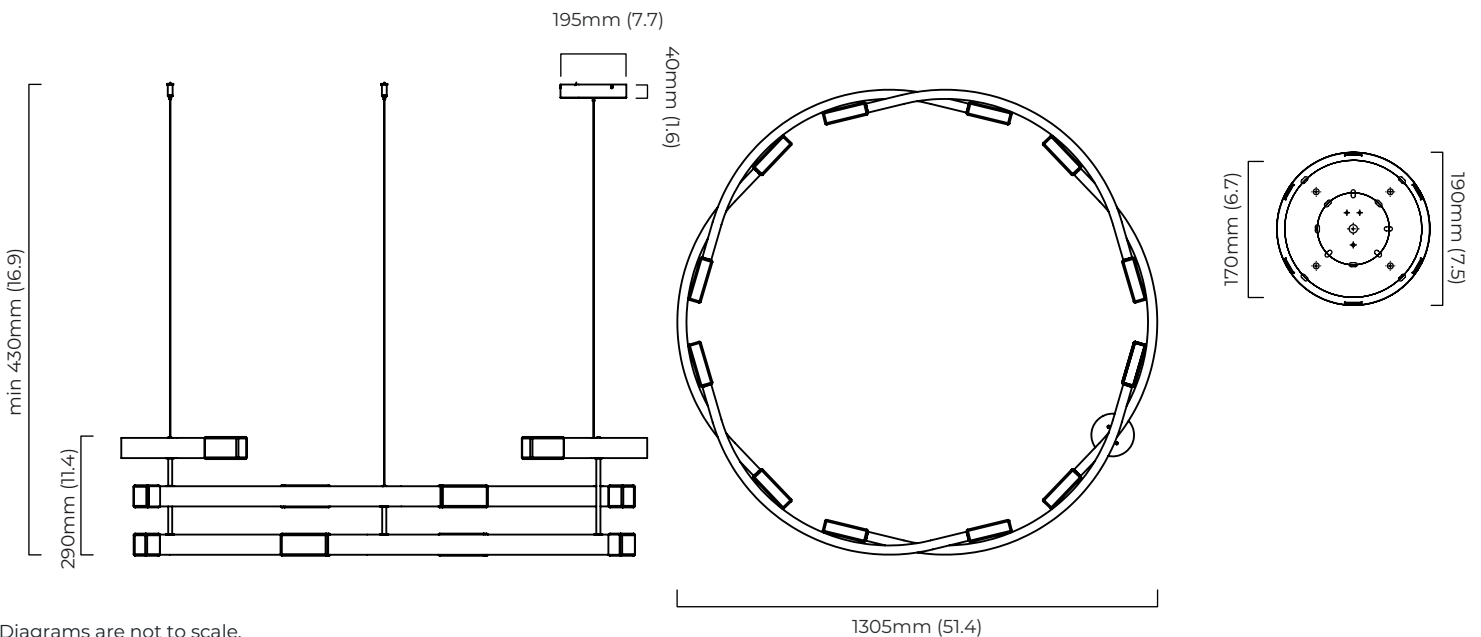

*Diagrams are not to scale.

TRACE CIRCULAR X-LARGE

CEILING MOUNTED

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
TRAPEXLABLG-CM-240	antique bronze with liquid cast glass	220 - 240V
TRAPEXLABLG-CM-DALIA-240	antique bronze with liquid cast glass - DALI A	220 - 240V
TRAPEXLABLG-CM-110	antique bronze with liquid cast glass	110 - 130V
TRAPEXLBZLG-CM-240	bronze with liquid cast glass	220 - 240V
TRAPEXLBZLG-CM-DALIA-240	bronze with liquid cast glass - DALI A	220 - 240V
TRAPEXLBZLG-CM-110	bronze with liquid cast glass	110 - 130V

CEILING ROSE

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
TRAPEXLABLG-CR-240	antique bronze with liquid cast glass	220 - 240V
TRAPEXLABLG-CR-DALIA-240	antique bronze with liquid cast glass - DALI A	220 - 240V
TRAPEXLABLG-CR-110	antique bronze with liquid cast glass	110 - 130V
TRAPEXLBZLG-CR-240	bronze with liquid cast glass	220 - 240V
TRAPEXLBZLG-CR-DALIA-240	bronze with liquid cast glass - DALI A	220 - 240V
TRAPEXLBZLG-CR-110	bronze with liquid cast glass	110 - 130V