

TRACE LINEAR 2 CEILING MOUNTING PLATE

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1400 x 350 x 450 mm (l x w x h)

WEIGHT

11kg (24.3lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 608 mm

maximum on request 8458 mm

supplied with 1000mm stainless steel power cable as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 16.8w - 2700k

110-130v - integrated LED - 16.8w - 2700k

LED driver to be installed in the ceiling cavity or remote

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request


CEILING ROSE / PLATE

ceiling plate - 195mm x 195mm x 8mm

CERTIFICATION



VIEW ON WEBSITE

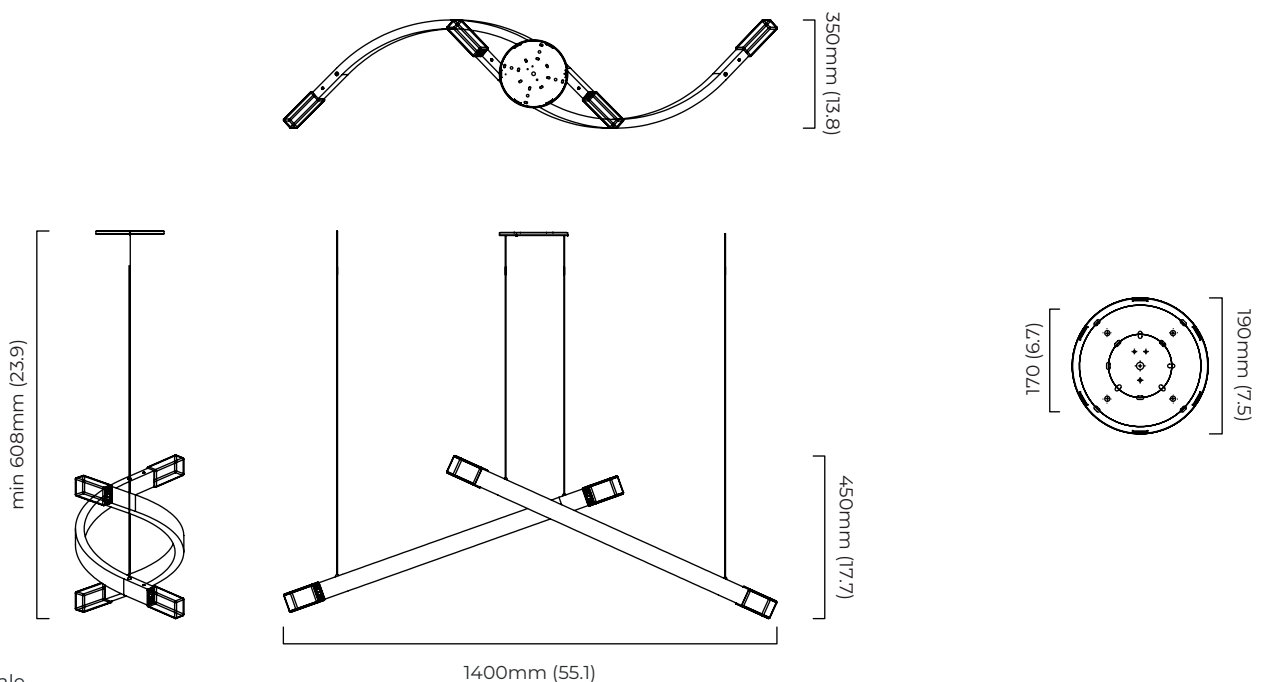

*Diagrams are not to scale.

TRACE LINEAR 2 CEILING MOUNTING ROSE

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1400 x 350 x 450 mm (l x w x h)

WEIGHT

11kg (24.3lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 640 mm

maximum on request 8490 mm

supplied with 1000mm stainless steel power cable as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 16.8w - 2700k

110-130v - integrated LED - 16.8w - 2700k

LED driver to be installed in the ceiling rose

DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard DALI option available (220-240v only)

0/1-10v (220-240v) - on request



CEILING ROSE / PLATE

ceiling rose - 195mm x 195mm x 40mm

CERTIFICATION



VIEW ON WEBSITE

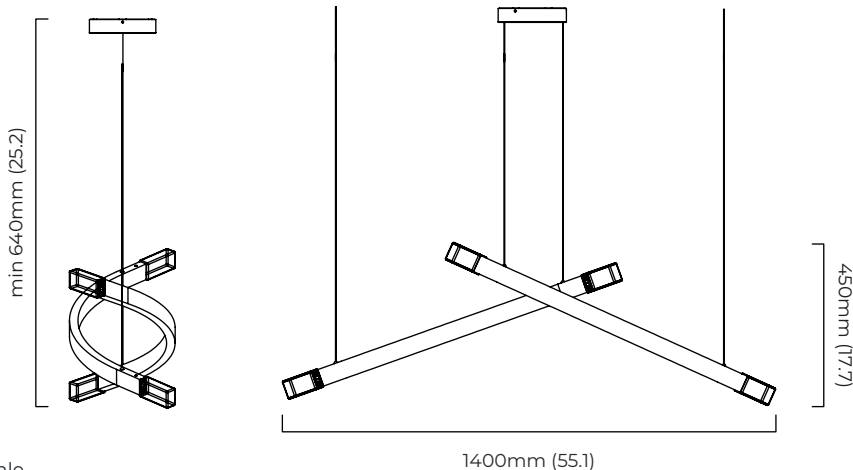

*Diagrams are not to scale.

TRACE LINEAR 2 CEILING MOUNTING PLATE - DALI A

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1400 x 350 x 450 mm (l x w x h)

WEIGHT

11kg (24.3lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 608 mm

maximum on request 8458 mm

supplied with 1000mm stainless steel power cable as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 16.8w - 2700k

DALI LED driver to be installed in the ceiling cavity or remote drivers must be installed up to 20 meters from the body of the light

DIMMING

DALI compatible




CEILING ROSE / PLATE

ceiling plate - 195mm x 195mm x 8mm

CERTIFICATION



VIEW ON WEBSITE

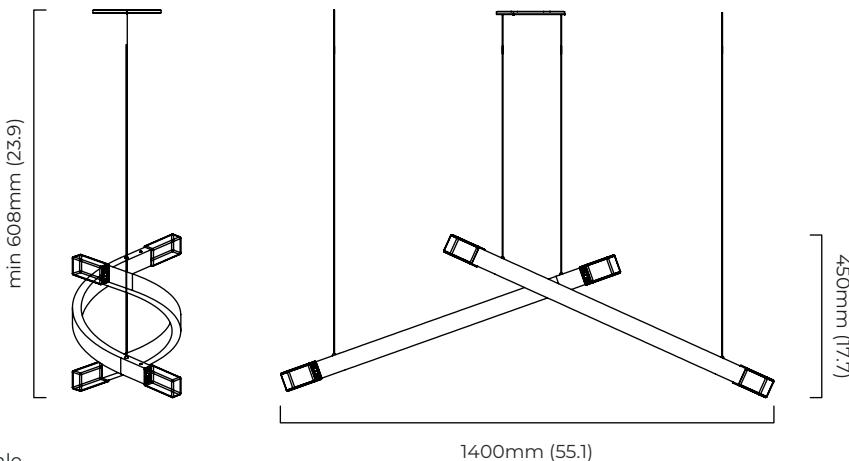

*Diagrams are not to scale.

TRACE LINEAR 2 CEILING MOUNTING ROSE - DALI A

FINISH

antique bronze with liquid cast glass
bronze with liquid cast glass

DIMENSIONS (body of fixture)

1400 x 350 x 450 mm (l x w x h)

WEIGHT

11kg (24.3lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 640 mm

maximum on request 8490 mm

supplied with 1000mm stainless steel power cable as standard (adjustable on site)

ILLUMINATION

220-240v - integrated LED - 16.8w - 2700k

DALI LED driver to be installed in the ceiling rose

DIMMING

DALI compatible



CEILING ROSE / PLATE

ceiling rose - 195mm x 195mm x 40mm

CERTIFICATION



VIEW ON WEBSITE

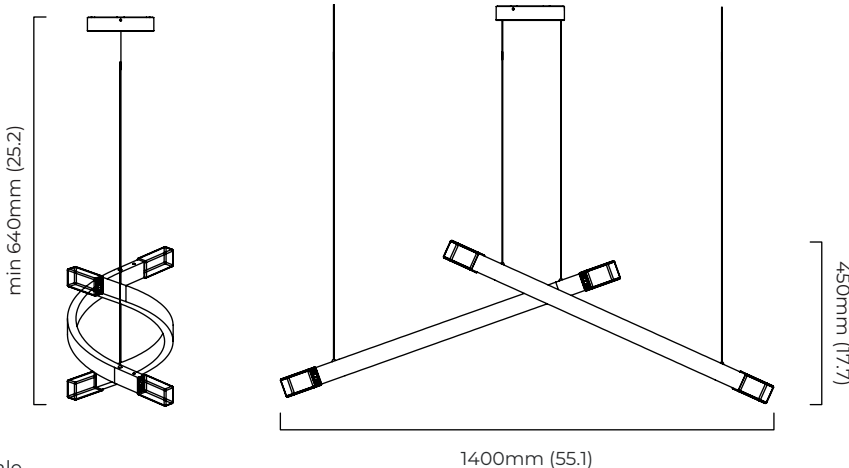

*Diagrams are not to scale.

TRACE LINEAR 2

CEILING MOUNTED

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
TRAPEL2ABLG-CM-240	antique bronze with liquid cast glass	220 - 240V
TRAPEL2ABLG-CM-DALIA-240	antique bronze with liquid cast glass - DALI A	220 - 240V
TRAPEL2ABLG-CM-110	antique bronze with liquid cast glass	110 - 130V
TRAPEL2BZLG-CM-240	bronze with liquid cast glass	220 - 240V
TRAPEL2BZLG-CM-DALIA-240	bronze with liquid cast glass - DALI A	220 - 240V
TRAPEL2BZLG-CM-110	bronze with liquid cast glass	110 - 130V

CEILING ROSE

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
TRAPEL2ABLG-CR-240	antique bronze with liquid cast glass	220 - 240V
TRAPEL2ABLG-CR-DALIA-240	antique bronze with liquid cast glass - DALI A	220 - 240V
TRAPEL2ABLG-CR-110	antique bronze with liquid cast glass	110 - 130V
TRAPEL2BZLG-CR-240	bronze with liquid cast glass	220 - 240V
TRAPEL2BZLG-CR-DALIA-240	bronze with liquid cast glass - DALI A	220 - 240V
TRAPEL2BZLG-CR-110	bronze with liquid cast glass	110 - 130V