

TECHNICAL SHEET


Halfway between design and art, Mami is a versatile and elegant collection. The white oval blown-glass body is reinterpreted with a modernist look in the suspension compositions, while remaining linear in the floor and table variants.

Certification



	1307-20 HORIZONTAL	1307-50 HORIZONTAL RECESSED CANOPY
Mounting	Suspension	Suspension
Environment	Indoor - Dry Location	Indoor - Dry Location
Materials	Metal	Metal
Voltage	120V 60Hz	24V
Source	LED 5 x 6W - CRI=90	LED 5 x 6W - CRI=90
Color temperature	3000K / 2700K	3000K / 2700K
Lighting control	Dimmable 0-10V	Remote driver (not included)
Cable RAL	7013	7013

Technical Drawing

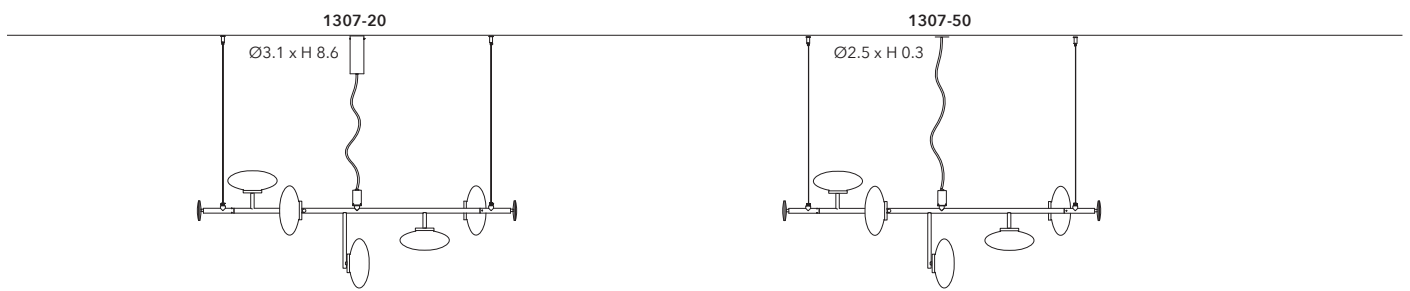

L51.2" x D24.8" x H18.9"
5 glasses ø 7.9"

L51.2" x D24.8" x H18.9"
5 glasses ø 7.9"

Finishes

Structure



Matt black



Brushed bronze

Glass



Acid-etched white

Mami Umberto Asnago

Codes Interpretation

1307 - 20 - 1103 - D2NU

1307
Year Collection

20
Typology Model

1103
Finish1 Finish2

D2NU
Lighting control Cable Source Wiring

CODES	SIZE	STRUCTURE	SHADE	DETAILS
1307-20-1103-D2NU	horizontal suspension	matt black	white acid-etched glass	dimnable 0-10V / 3000K
1307-20-1103-D2WU	horizontal suspension	matt black	white acid-etched glass	dimnable 0-10V / 2700K
1307-20-1703-D2NU	horizontal suspension	brushed bronze	white acid-etched glass	dimnable 0-10V / 3000K
1307-20-1703-D2WU	horizontal suspension	brushed bronze	white acid-etched glass	dimnable 0-10V / 2700K
1307-50-1103-N2WU	horizontal suspension recessed canopy	matt black	white acid-etched glass	remote driver not included / 2700K
1307-50-1103-N2NU	horizontal suspension recessed canopy	matt black	white acid-etched glass	remote driver not included / 3000K
1307-50-1703-N2WU	horizontal suspension recessed canopy	brushed bronze	white acid-etched glass	remote driver not included / 2700K
1307-50-1703-N2NU	horizontal suspension recessed canopy	brushed bronze	white acid-etched glass	remote driver not included / 3000K

Legenda

Lighting Control	D = Dimmable	N = Not dimmable	
Cable	X = not suspension lamp	2 = 2m	4 = 4m
Source	B = Bulb	W = Integrated LED 2700K	N = Integrated LED 3000K
Wiring	E = Universal	U = USA with certification	V = USA without certification

